


DUO EKO 15 kW

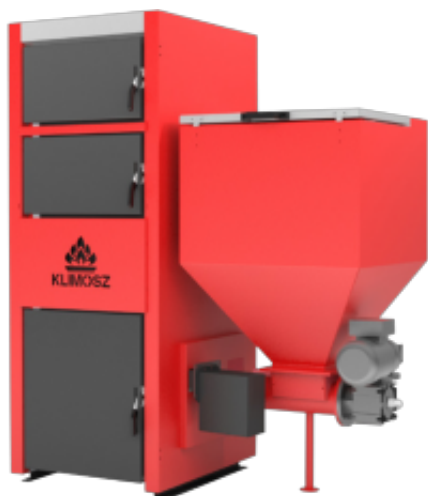

Ražot?js: Klimosz

Produkta kods: 0020

Pieejam?ba: Ražot?ja noliktav?

Svars: 405.00kg

Izm?ri: 0.00cm x 0.00cm x 0.00cm

Cena ar PVN 21%: 3,266.99?€

Bez PVN: 2,699.99?€

apraksts

Kombin?tais atom?tiskais granulu katls ar vulk?na tipa degli, iesp?ja kurin?t malkas rež?m?.

Viegli t?r?ms, augstas efektivit?tes cauru?veida siltummainis

KLIMOS DUOPELET EKO ir dabai draudz?gs apkures katls ar zemu CO, Nox izmešanas emisiju - apstiprin?ts 5.klases Emisijas sertifik?ts;

Ražots no lab?k?s kvalit?tes apkures met?la P265GH;


Tvertni iesp?jams uzst?d?t jebkur? pus?;

Augsts lietder?bas koeficients - virs 90 %;

Produkta galerija



	S	L	H	H1	H2	L1	L2	L3	H1	H2	Z1	Z2	P1	P2	L1	L2
	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060
10	1180	780	1345	550	600	630	120	780	1000	1136	178	90	30	215	55	805
15	1180	825	1555	550	600	715	800	780	1265	1136	178	90	30	215	55	805
30	1250	825	1555	620	600	715	800	780	1365	1136	178	90	30	215	55	805
45	1545	900	1555	620	600	850	110	800	1365	1405	178	90	30	215	55	805

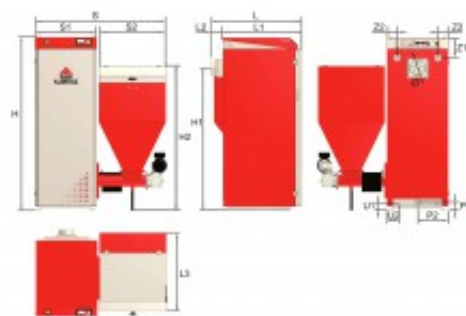

	S	L	H	H1	H2	L1	L2	L3	H1	H2	Z1	Z2	P1	P2	L1	L2
	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060	1060
10	1180	780	1345	550	600	630	120	780	1000	1136	178	90	30	215	55	805
15	1180	825	1555	550	600	715	800	780	1265	1136	178	90	30	215	55	805
30	1250	825	1555	620	600	715	800	780	1365	1136	178	90	30	215	55	805
45	1545	900	1555	620	600	850	110	800	1365	1405	178	90	30	215	55	805

Version DG

Version DG

TECHNICAL DATA	DG 10	DG 15	DG 30	DG 45
CE mark for full guaranteed use (years)	10/15	10/15	10/15	10/15
Efficiency for full guaranteed use (years)	10/15	10/15	10/15	10/15
CE mark efficiency class	D	C	B	A
Minimum power for full guaranteed use (kW)	12 kW / 10.7 kW	20.2 kW / 18.6 kW	28 kW / 26.1 kW	35 kW / 32.6 kW
Efficiency for full guaranteed use (years)	10/15 / 17.5/15	10/15 / 18.2/15	10/15 / 19.2/15	10/15 / 19/15
Power range	8.5 - 15 kW	15 - 25.2 kW	21.5 - 28 kW	18.5 - 35 kW
Room temperature	100 - 200 °C	100 - 200 °C	100 - 200 °C	100 - 200 °C
Heat exchanger area	2.7 m²	3.7 m²	5.5 m²	8.2 m²
Water capacity	10 dm³	10 dm³	10 dm³	17.5 dm³
Recommended chimney height	10 - 25 m	10 - 25 m	10 - 25 m	10 - 25 m
Provides technical manual training system	Yes	Yes	Yes	Yes
Height	1400 mm	1545 mm	1780 mm	1945 mm
Depth	780 mm	825 mm	825 mm	825 mm
Width without storage (DIN EN 15189)	1060 mm / 1060 mm	1060 mm / 1060 mm	1060 mm / 1060 mm	1060 mm / 1060 mm
Weight (empty unit)	110 kg	125 kg	135 kg	145 kg
Weight (with full storage capacity)	140 kg / 140 kg	160 kg / 160 kg	180 kg / 180 kg	210 kg / 210 kg
Weight (DIN EN 15189)	80 / 120 kg	100 / 120 kg	120 / 140 kg	140 / 160 kg

